



**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

GB00/02944

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein. y

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

I also certify that by virtue of an assignment registered under the Patents Act 1977, the application is now proceeding in the name as substituted.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

JEvens

Dated 23 August 2000

THIS PAGE BLANK (USPTO)



The
Patent
Office



INVESTOR IN PEOPLE

GB9917856.8


By virtue of a direction given under Section 30 of the Patents Act 1977, the application is proceeding in the name of

MARCONI CASWELL LTD
One Bruton Street
LONDON
IX 8AQ
United Kingdom

Incorporated in the United Kingdom

[ADP No. 07806326001]

THIS PAGE BLANK (USPTO)

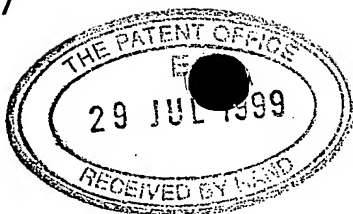

30 JUL 99 E465897-1 C06256
P01/7700 0.00 791856.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference P/61827.GBA/MRCE

2. Patent application number
(The Patent Office will fill in this part)

9917856.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)
Patents ADP number (if you know it)

Marconi Electronic Systems Ltd
The Grove
Warren Lane
Middx
HA7 4LY

SECTION 30 (1)(7) APPLICATION FILED 27.1.00.

If the applicant is a corporate body, give the country/state of its incorporation

GT. BRITAIN 6079448001
ALL 18/8/99 HED

4. Title of the invention

PIEZO-ELECTRIC TAG

5. Name Marconi Intellectual Property
Waterhouse Lane

Gillian Cockayne

COLIN FRANCIS HOSTE

"Add CHELMSFORD
to w/ Essex
(inclu CM1 2QX

GEC PATENT DEPARTMENT
WATERHOUSE LANE
CHELMSFORD
ESSEX CM1 2QX

FS1/71

5/8/99

LM

Patei.

748 2714001

40527004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

No

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

No

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body
- See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	(24)
Claim(s)	(5)
Abstract	(1)
Drawing(s)	(6)

10. If you are also filing any of the following, state how many against each item.

Priority documents	(-)
Translations of priority documents	(-)
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	(2)
Request for preliminary examination and search (Patents Form 9/77)	(1)
Request for substantive examination (Patents Form 10/77)	(-)
Any other documents (please specify)	(-)

11. I/We request the grant of a patent on the basis of this application.

Signature

(G Cockayne)

Date

28/7/99

12. Name and daytime telephone number of person to contact in the United Kingdom

T Norris Tel. 01245 27 5133

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

PIEZO-ELECTRIC TAG

The present invention relates to a piezo-electric tag.

5 Tags are portable devices which are capable of being attached to items or personnel wearable. They can be used, for example, for remotely identifying the items or receiving information therefrom. In many applications, the tags must be compact and be capable of responding after long periods of inactivity, for example where the tags are incorporated into items placed into storage for periods of several years.

10

Conventionally, tags can be passive devices which modify and reflect interrogating radiation directed thereto from associated interrogating sources. Because the tags do not provide power gain, their operating range from the sources is often limited to a few metres.

15 Active tags are known which incorporate onboard power sources such as a miniature electrical cell. Such power sources have limited operating lifetime, especially if they are required to power their associated tags continuously. Moreover, the sources can make the tags unacceptably bulky for some applications, for example where tags are implemented as film strips for incorporating into spines of library books.

20

Although it is feasible to power tags from radiation incident thereupon, for example using solar cells incorporated into the tags or by inductively coupling energy from associated interrogating sources to the tags, it is not practicable in some circumstances to do this for safety reasons, for reasons of restricted operating range or for reasons of obscuration in the

25 case of solar cells.

The inventor has appreciated that a principal problem associated with tags operated from radiation incident thereupon is that it is difficult to generate potentials on the tags of sufficient magnitude to operate semiconductor integrated circuits incorporated therein. Such circuits frequently require a supply potential a several volts to function.

5

The inventor has devised a tag which addresses this principal problem and which is operable, for example, from moderate levels of incident radiation thereupon in the order of 10 μ W. Such moderate levels of radiation rarely represent any health and safety risk.

10

According to a first aspect of the present invention, there is provided a piezo-electric tag including receiving means for receiving input radiation and generating a corresponding received signal, piezo-electric vibrating means for increasing voltage magnitude of the received signal to generate a supply potential and electronic circuit means powerable by the supply potential.

15

The invention provides the advantage that the vibrating means is capable of providing voltage magnification, thereby enabling the tag to be powered from radiation incident thereupon.

20

For the purpose of describing the invention, microwave frequencies means frequencies substantially in a range of 1 GHz to 30 GHz.

25

Advantageously, the vibrating means comprises a piezo-electric transformer incorporating mutually vibrationally coupled primary and secondary regions, the transformer operable to be excited into vibration by the received signal at the primary region and to generate a

corresponding output signal at the secondary region for use in generating the supply potential.

5 The piezo-electric transformer provides the advantage that it is capable of being compact, inexpensive and providing a considerable increase in signal voltage amplitude from its primary region to its secondary region, the increase approaching 100 times or more.

10 Alternatively, the vibrating means comprises a piezo-electric bi-morph operable to be excited into vibration by the received signal and to generate a corresponding output signal for use in generating the supply potential.

15 As a further alternative, the vibrating means conveniently comprises a silicon micromachined device comprising an array of one or more resonant elements, each element incorporating an associated piezo-electric transducer operable to generate an element signal in response to vibration of its associated element, the transducers connected in series to add their element signals to provide an overall output from which the supply potential is generated, and driving means operable to be driven by the received signal for stimulating the one or more elements into vibration and thereby generating the supply potential.

20 The silicon device provides the advantage that it capable of being mass produced and being highly compact, for example 2 mm wide by 2 mm long by 0.6 mm thick.

25 Advantageously, the resonant elements in the silicon device are operable at resonance to generate the supply potential. Operation at resonance provides the benefit that voltage magnification in the device is greater than off-resonance.

Moreover, to obtain even greater voltage magnification, the resonant elements are housed in an evacuated environment. Operation in the evacuated environment increases Q-factor of the resonant elements, thereby increasing voltage magnification provided by the silicon device.

5

Conveniently, the receiving means in the tag incorporates demodulating means for demodulating modulation components present in the received radiation to generate the received signal. Inclusion of the demodulating means provides the benefit of signal frequency transformation, thereby enabling the tag to receive radiation providing power thereto at a different carrier frequency to the frequency of vibration required for exciting the vibrating means.

10

Advantageously, the demodulating means incorporates zero-bias Schottky diodes for demodulating the received radiation to generate the received signal. The zero-bias Schottky diodes provide the advantage of exhibiting a smaller forward conduction voltage drop compared to p-n silicon junction diodes, thereby enabling the tag to function with lower levels of received radiation power, for example 10 μ W.

15

Conveniently, the receiving means incorporates one or more conductive metallic film dipole antennae for one or more of receiving and emitting radiation. Such dipoles provide the advantage of being potentially compact and inexpensive to mass produce.

20

The tag beneficially incorporates two antennae, one antenna for use in generating the received signal and the other incorporated into responding means for at least one of emitting and receiving radiation. Incorporating two antennae provides the advantage that

25

each antennae can be optimized to function at its respective radiation frequency. Conveniently, the antennae are conductive metallic film dipole antennae for reasons of increased compactness and reduced manufacturing cost. Alternatively, the antennae can also be patch antennae or loop antennae.

5

In some practical applications of the tag, it is advantageous that the tag is implemented in the form of a block, for example a cuboid block. This form provides the tag with enhanced mechanical robustness and thereby increases its reliability.

10

When the tag is personnel wearable or attachable to items of merchandise, it is convenient that the tag is in the form of a planar card. This form provides the advantage that the tag can be of similar size to existing planar cards, for example debit cards, thereby providing a degree of potential compatibility with existing card reading equipment.

15

When the tag is implemented in a planar card form, it conveniently incorporates recesses for accommodating the receiving means, the vibrating means and the responding means. Such recesses provide protection for the receiving means and the responding means, thereby making the tag more robust.

20

In the tag, the circuit means can comprises responding means for emitting output radiation from the tag, the responding means powerable by the supply potential. Incorporation of the responding means enables the tag to be remotely identified when interrogated.

25

Conveniently, the responding means is a transponder operable to receive input radiation to the tag and emit output radiation in response from the tag. Incorporation of the transponder

enables the tag to be selectively responsive to interrogating radiation in an environment which is flood illuminated with radiation for exciting the vibrating means.

Advantageously, the transponder is operable to modulate the output radiation with a signature code by which the tag can be individually identified. The code enables the tag to be individually recognised which is highly advantageous where the tag is personnel wearable and used to identify its wearer, for example as in personal identification tags worn by employees in a commercial establishment.

When operating with high frequency radiation, for example at UHF frequencies from 300 MHZ to 1 GHz and from microwave frequencies from 1 GHz to 50 GHz, the tag advantageously has the transponder incorporating a reflection amplifier for amplifying the input radiation to generate the output radiation. The reflection amplifier provides the advantage that it is capable of providing a high gain, for example in a range of +10 dB to +30 dB, for relatively low current consumption, for example in the order of a few microamperes.

Advantageously, especially when the transponder provides considerable gain, the transponder is operable in a pseudo-continuous mode and incorporates a delay line for delaying the output radiation relative to the input radiation, thereby counteracting spontaneous oscillation from arising within the transponder from feedback therein.

Conveniently, the tag is arranged such that the receiving means incorporates first and second antennae for generating the received signal for exciting the vibrating means, the first antenna adapted to respond to microwave radiation and the second antenna adapted to respond to

radiation having a carrier frequency corresponding to a resonant frequency of the vibrating means. Incorporation of two antennae for generating the received signal provides the advantage that the tag is powerable from radiation having a number of possible carrier frequencies.

5

In a second aspect of the invention, there is provided a method of guiding a vehicle along a path to a destination, the method comprising the steps of:

- 10 (a) distributing a plurality of tags according to the first aspect along the path and providing the vehicle with a direction sensitive interrogating source adapted to transpond with the tags;
- (b) interrogating the tags from the source by emitting radiation to the tags and receiving radiation therefrom, thereby determining direction of the tags relative to the source and hence determining the path;
- 15 (c) moving the vehicle along the path; and
- (d) repeating steps (b) and (c) until the vehicle reaches the destination.

Embodiments of the invention will now be described, by way of example only, with reference to the following diagrams in which:

20

Figure 1 is a schematic of a first embodiment of the invention;

Figure 2 is an exterior perspective view of the first embodiment shown in Figure 1;

25 Figure 3 is an illustration of a second embodiment of the invention;

Figure 4 is an illustration of a third embodiment of the invention incorporating a simplified circuit utilising loop antennae;

Figure 5 is an illustration of a fourth embodiment of the invention adapted for operating with Manchester encoded signals; and

Figure 6 is an illustration of a fifth embodiment of the invention incorporating a single antenna for use in emitting and receiving radiation.

Referring to Figure 1, there is shown a piezoelectric tag according to a first embodiment of the invention indicated by 10. The tag 10 incorporates a number of sections, namely a first dipole antenna indicated by 20 and included within a dotted line 22, a first rectification circuit indicated by 30 and included within a dotted line 32, a piezoelectric transformer indicated by 40 incorporating a primary region 42 and a secondary region 44, a second rectification circuit indicated by 50 and included with a dotted line 52, and a transponder circuit indicated by 60 and included with a dotted line 62. The sections are incorporated into a plastic card having external dimensions of 55 mm width, 85 mm length and 1 mm thickness; this will be further described later with reference to Figure 2.

The transponder 60 incorporates a dipole antenna indicated by 64 and included within a dotted line 66, a bi-directional surface acoustic wave (SAW) delay line 68 and a reflection amplifier 70.

The first dipole antenna 20 is connected to an input of the first rectifier circuit 30. The circuit 30 includes an output which is connected to the primary region 42 of the transformer 40. The secondary region 44 thereof is connected to an input of the second rectifier circuit

50. The second circuit 50 incorporates an output which is connected to a power supply input to the transponder 60.

Operation of the tag 10 will now be described in broad overview after which its sections will be described in further detail.

The antenna 20 receives incoming radiation 100 from an interrogating source (not shown).

The radiation 100 has a carrier frequency of 1 GHz which is amplitude modulated to a modulation depth in a range of 50% to 100% by a modulating signal which has a frequency

of 300 kHz. Moreover, the radiation 100 has a power density of 5 mW/m^2 at the antenna

20. The radiation 100 couples to the antenna 20 and generates a corresponding signal S_a

across output terminals T_1, T_2 of the antenna 20; the signal S_a has a frequency of 1 GHz and an amplitude in the order of 80 mV. The signal S_a propagates to the first circuit 30 which

demodulates it and then filters it to substantially remove signal components above 1 MHz

to generate a unipolar modulated signal S_b having signal components at 300 kHz. The

transformer 40 receives the signal S_b across its primary region terminals P_1, P_2 . The signal

S_b stimulates the primary and secondary regions 42, 44 to resonate at 300 kHz in their longitudinal mode of vibration. At resonance, the transformer 40 magnifies the signal S_b

received at its primary region 42 to generate a bipolar alternating signal S_c at a secondary

region terminal S_1 ; the signal S_c having an amplitude in the order of 3 volts. The second

circuit 50 receives the signal S_c and demodulates and filters it to generate a substantially smoothed unipolar signal S_d at an output terminal of the circuit 50. The transponder 60

receives the signal S_d and uses it as a supply potential to power active circuits incorporated thereinto.

The transformer 40 provides the advantage of performing a step-up voltage conversion

function from its primary region 42 to its secondary region 44 at resonance, thereby providing the signal S_a of sufficient magnitude of several volts to power active electronic devices incorporated into the transponder 60, namely the reflection amplifier 70. Although the transformer 40 cannot provide power gain, it is effective to provide an impedance conversion for matching an input impedance presented by the second circuit 50 to an output impedance presented by the first circuit 30; the signal S_a of relatively lower voltage amplitude from the antenna 20 which is unsuitable for powering circuits is thereby converted into the signal S_a of relatively high voltage, namely several volts, which is suitable for powering circuits.

The transponder 60 receives incoming continuous-wave radiation 102 from the interrogating source. The radiation 102 has a carrier frequency of 1.5 GHz. In response to receiving the radiation 102, the antenna 64 generates a corresponding signal S_e at its terminals which passes to the delay line 68 and propagates therethrough whilst being delayed therein to provide a signal S_f at an input to the reflection amplifier 70. The amplifier 70 presents a modulated negative resistance at its input/output terminal and thereby reflectively amplifies the signal S_f to generate a corresponding modulated amplified signal S_g . The signal S_g propagates back through the delay line 68 whilst being delayed therein to the antenna 64 from where it is emitted as return radiation. The interrogating source receives the return radiation and determines that it is modulated, thereby detecting the presence of the tag 10.

The tag 10 provides the benefit that it is capable of providing the modulated return radiation without there being a need for the tag 10 to incorporate limited lifetime power sources such as batteries for powering its active circuits. Avoidance of the need for batteries provides the tag 10 with a potentially useable lifetime of several decades or more. Thus, the tag 10 is

thereby suitable for attachment to products which are to be stored for lengthy periods of time, for example several years.

Sections of the tag 10 will now be described in more detail.

5

The antenna 20 is a thin film dipole formed by conductive tracks on a major surface of the card. It is designed to operate at a radiation frequency of 1 GHz. The terminal T_2 of the antenna 20 is connected to a signal ground on the card, and the terminal T_1 is connected to the first circuit 30.

10

The circuit 30 incorporates two zero-bias Schottky diodes D_1 , D_2 and a filter capacitor C_1 . The diode D_2 is connected by its anode to the diode D_1 at its cathode to form an input terminal; the terminal is connected to the terminal T_1 of the antenna 20. The diode D_2 is connected at its cathode to a first terminal of the capacitor C_1 . The capacitor C_1 incorporates a second terminal which is connected to the signal ground. The diode D_1 incorporates an anode which is also connected to the signal ground.

15

The diodes D_1 , D_2 are operable to provide signal rectification at microwave frequencies, for example 1 GHz, and be responsive to signal amplitudes in the order of mV. They incorporate metal-semiconductor junctions for performing rectification. Ordinary p-n silicon junction diodes are not as desirable for use in substitution for the diodes D_1 , D_2 because of their relatively greater voltage drop when operating under forward bias. The capacitor C_1 is operable to shunt signal components at microwave frequencies to the signal ground. An output from the circuit 30 is extracted from across the capacitor C_1 , namely from the first terminal of the capacitor C_1 relative to the signal ground.

20

25

The transformer 40 is fabricated from a hard piezoelectric lead zirconate titanate (PZT) material whose dielectric loss coefficient is less than 0.02; the dielectric loss coefficient is defined as a ratio of energy dissipated per cycle to energy stored per cycle. It has exterior dimensions of 3 mm width, 6 mm length and 1 mm thickness and is therefore of an elongate form having an elongate axis. In operation, it is designed to periodically vibrate in a longitudinal manner along the elongate axis at a resonant frequency of approximately 300 kHz. The primary region 42 comprises a multilayer stack of piezoelectric elements, each element having exterior dimensions of 3 mm length, 3 mm width and 0.1 mm thickness and polarised in its thickness direction. The secondary region 44 comprises a single element having exterior dimensions of 3 mm width, 3 mm length and 1 mm thickness; the region 44 is polarised in a direction parallel to the elongate axis when assembled in the transformer 40. The elements of the primary region 42 and the second region 44 are mutually joined by sintering them together or using an epoxy resin of comparable rigidity to the PZT material.

In operation, the transformer 40 exhibits a longitudinal resonance mode at 300 kHz frequency having an associated Q-factor in the order of 100. It functions at its resonance to magnify the voltage amplitude of signals applied to its primary region 42 by generating corresponding signals at its secondary region 44 of relatively greater voltage amplitude. This magnification arises at the expense of reduced signal current at the secondary region 44 compared to the primary region 42; in other words, the transformer 40 provides an impedance match but does not impart power gain.

The circuit 50 employs an identical configuration to the circuit 30. The capacitor C_1 and

the diodes D_1 , D_2 in the circuit 30 correspond to a capacitor C_2 and diodes D_3 , D_4 in the circuit 50 respectively.

5 The reflection amplifier 70 of the transponder 60 is connected at its power supply connections to the signal ground and to the first terminal of the capacitor C_2 which is not connected to the signal ground. Electrical power is thereby supplied to the amplifier 70 in operation.

10 The reflection amplifier 70 incorporates a switching oscillator which periodically switches reflective gain provided by the amplifier 70 between a high gain state and a low gain state. The oscillator is operable to switch the amplifier 70 in a cyclical manner between the high gain state for a period of 2τ and the low gain state for a period of 2τ . In the low gain state, the amplifier 70 is incapable of sustaining spontaneous oscillation within the transponder 60. The period of 2τ corresponds to twice a time duration for signals to propagate in one
15 direction through the delay line 68. Periodic switching of gain provided by the amplifier 70 counteracts the formation of spontaneous oscillation within the transponder 60 because amplified signals from the amplifier 70 are reflected from the antenna 64 and return to the amplifier 70 when it is switched to its low gain state. In its high gain state, the amplifier 70 provides +23 dB gain which could result in the formation of spontaneous oscillation if the
20 amplifier 70 were not periodically gain switched to the lower gain state as described above.

Referring now to Figure 2, there is provided an exterior perspective illustration of the tag 10. The tag 10 incorporates a non-conducting plastic substrate layer 200 having first and second major faces. Onto the first major face is bonded a conductive earth-plane layer 210
25 of aluminium material in a range of $30\text{ }\mu\text{m}$ to $100\text{ }\mu\text{m}$ thick. The layers 200, 210 have a

length of 85 mm in an x-direction indicated by an arrow 212, and a width of 55 mm in a y-direction indicated by the arrow 214. The layers 200, 210 have a combined thickness of 1 mm in a z-direction indicated by an arrow 216.

5 The substrate layer 200 incorporates recesses 230, 240, 250, 260 moulded therein to accommodate the circuits 30, 50, the transformer 40, the amplifier 70 and the delay line 68 respectively. Being elongate, the tag 10 has an elongate axis in the x-direction. At first and second elongate ends of the tag 10, there are formed the antennae 20, 64 respectively. The antennae 20, 64 are both bow-tie dipole antennae incorporating deposited metallic regions
10 formed onto the second major face of the layer 200. Connecting conductive tracks are also formed on the second major face to connect the antennae 20, 64 to the circuits 30, 50 and the delay line 68 respectively. Further tracks are included to connect the circuits 30, 50 to the transformer 40 and the amplifier 70, and the delay line 68 to the amplifier 70. Wire bonding techniques are employed for bonding from the tracks to the recesses 230, 240, 250,
15 260.

When fabricated, a 100 μm thick protective plastic layer (not shown) is added onto the second major face to protect the antennae 20, 64, the tracking, the circuits 30, 50, the transformer 40, the amplifier 70 and the delay line 68. Graphical information, for example
20 optically readable bar codes or a photographic image, can be optionally printed onto the protective layer. The photographic image is particularly relevant when the tag 10 is personnel wearable and used as a remotely interrogatable identity tag.

Referring now to Figure 3, there is shown a piezoelectric tag according to a second
25 embodiment of the invention indicated by 300. The tag 300 is identical to the tag 10 except

that it additionally includes a planar coil 310 in parallel connection with the capacitor C_1 .

The earth plane layer 210 can be selectively absent in a vicinity of the coil 310 so as not to excessively screen the coil 310. The coil 310 is formed onto the second major face of the layer 200 shown in Figure 2 adjacent to the circuits 30, 50 and the transformer 40. The

5 capacitor C_1 , in parallel with an electrical capacitance presented by the transformer 40 between its terminals P_1 , P_2 , and the coil 320 are operable to parallel resonate at the resonant frequency of the transformer 40, namely 300 kHz. Inclusion of the coil 320 enables the tag

300 to be powered not only from 1 GHz radiation received at the antenna 20 but also from inductively coupled magnetic fields at 300 kHz coupling to the coil 320. The tag 300 can

10 thereby be powered in two different modes so that it can be used in environments where radiation at either or both frequencies, 300 kHz and 1 GHz, are present; for example, in environments where microwave radiation cannot be tolerated for safety reasons.

As an alternative to using the diodes D1 to D4 in the tags 10, 300, FETs functioning as

15 asynchronous detectors may be employed. FETS operating in this mode exhibit a voltage drop thereacross in the order of microvolts.

Moreover, the antennae 20, 64 may be substituted by a single patch antenna or a single loop antenna operable to receive and emit radiation and convey signals to the circuit 30, and to

20 and from the delay line 68. Although the tags 10, 300 are described as being receptive and emissive at radiation frequencies of 1 GHz and 1.5 GHz, they can be operated at other

microwave frequencies by modifying dimensions of features of the antennae 20, 64 and the delay line 68. At microwave frequencies in excess of 10 GHz, the delay line 68 is

advantageously replaced by a magnetostatic wave delay line (MWDL), for example a delay

25 line incorporating a film of yttrium iron garnet (YIG) providing a signal propagation path

in the delay line.

Furthermore, the tags 10, 300 can be modified by replacing the transponder 60 with, for example, a simple oscillator emitting through its antenna encoded radiation unique to the oscillator, thereby enabling the tags 10, 300 when modified to be uniquely identified from the radiation emitted therefrom. Additionally, the transponder 60 can be operable to emit radiation during a first period and be inactive during a second period, the transponder arranged to switch cyclically between the first and second period; this provides the advantage that the transponder 60 can respond by emitting bursts of relatively more powerful radiation during the first period and conserve energy during the second period.

Referring now to Figure 4, is an illustration of a piezo-electric tag indicated by 400 which incorporates a simplified circuit utilising a first loop antenna 410 for receiving radiation, a transmitter module (TX) 420 and a second loop antenna 430 for emitting radiation. The tag 400 further comprises the transformer 40 and the second rectifier circuit 50. In a similar manner to the tags 10, 300, the tag 400 is powered from radiation incident thereupon.

The antenna 410 includes first and second connections, the first connection connected to a signal earth plane of the tag 400 and the second connection connected to the terminal P_1 of the transformer 40. The terminal P_2 of the transformer 40 is connected to the signal earth plane. The terminal S_1 of the transformer 40 is connected to the circuit 50, and the output from the circuit 50 is connected to a V_s power input of a pulsed transmitter 420. The transmitter 420 is also connected to the signal earth plane. Moreover, the transmitter 420 includes an output Q which is connected to a first connection of the antenna 430. A second connection of the antenna 430 is connected to the signal earth plane.

The antenna 410 provides an inductance at its connections which is arranged to electrically resonate with a capacitance exhibited by the transformer 40 across its terminals P_1 , P_2 at a frequency corresponding to input radiation to the tag 400 and also to a vibrational mode of the transformer 40 when functioning to increasing signal voltage from its primary region to its secondary region. The transmitter 420 incorporates a transistor biased into class C mode of operation such that it only conducts for part of a signal cycle when functional when an output from the circuit 50 to the transmitter 420 exceeds a threshold value. When the output from the circuit 50 is less than the threshold value, the transistor is non-conducting, thereby conserving power and providing the circuit 50 with maximum opportunity to develop a potential.

Operation of the tag 400 will now be described with reference to Figure 4. The antenna 410 receives radiation incident on the tag 400 at a frequency of 300 kHz and provides a 300 kHz signal across the terminals P_1 , P_2 which excites the transformer 40 into resonance. The transformer 40 provides a voltage stepped-up signal at a frequency of 300 kHz at its secondary terminal S_1 . The signal passes to the circuit 50 which rectifies it to provide a d.c. potential across the capacitor C_2 . This potential is supplied to the transmitter 420 at its V_s power input. When the potential exceeds a value of 2 volts relative to the signal earth, the transmitter 420 becomes active and generates at its output Q an output signal in the form of bursts of signal, each burst comprising a sequence of 500 kHz pulses, each burst having a duration of 50 μ sec and the bursts having a repetition rate of 2 Hz. The output signal couples from the transmitter 420 to the antenna 430 from where it is emitted as radiation.

The tag 400 provides the advantage that it is simpler and potentially cheaper to manufacture than the tags 10, 300. When the tag 400 is manufactured in volume, the transmitter 420 of

each tag 400 can be customized to generate bursts of 500 kHz radiation at a repetition rate unique to the tag 420, thereby distinguishing it from other tags of identical design. Class C operation provides the advantage that the transistor does not consume power until radiation above a threshold amplitude is received at the tag 400 which causes the transistor
5 to be driven into an active region of its characteristics.

Modifications can be made to the tag 400 without departing from the scope of the invention. For example, the transformer 40 can be replaced by a piezo-electric vibrating bi-morph or a silicon micromachined vibrating structure capable of providing an increased signal voltage
10 at its secondary region relative to its primary region.

Referring now to Figure 5, there is shown a tag indicated by 500 for operating with Manchester bi-phase encoded signals. The tag 500 comprises the antenna 20, the circuits 30, 50, and the transformer 40. It further comprises a logic unit 510 and a transmitter 520
15 linked to a loop antenna 530. The antenna 20 is connected to the circuit 30 which is in turn connected to the transformer 40 and then to the circuit 50 in an identical manner to the tag 10. An output from the circuit 50 generated across the capacitor C_2 is connected to the logic unit 510 and the transmitter 520. Inputs Clk and "Data input" of the unit 510 are connected to ^{the} terminals S_1 and P_1 of the transformer 40 respectively.

20 The unit 510 incorporates an output D_o which is connected to an input D_i of the transmitter 520. The transmitter 520 includes an output U which is connected to one connection of the antenna 530; another connection of the antenna 530 is connected to a signal earth of the tag 500.

25

A Manchester bi-phase encoded signal M will now be described. A digital data signal D has two states corresponding to logic 0 and logic 1. The signal D switches between these two states to convey a stream of data comprising 0's and 1's. The signal D remains in either of the two states for periods of not less than 2τ where τ is a time constant. The signal D is then exclusive-ORed with a clock signal K having a frequency of $1/2\tau$ to generate the signal M. The advantage of the Manchester bi-phase signal is that it is constantly changing even when the signal D is in a constant 0 or 1 state.

Operation of the tag 500 will now be described decoding the signal M. Radiation having a carrier frequency of 1 GHz and modulated by the signal M is received at the antenna 20 which generates a corresponding 1 GHz modulated signal. The circuit 30 demodulates the 1 GHz signal to generate the signal M at the terminal P₁ of the transformer 40. The clock signal K is arranged to have a principal frequency component corresponding to a resonance mode of the transformer 40 at which it provides voltage increase from its primary region 42 to its secondary region 44. Because the transformer 40 exhibits a relatively narrow resonance peak, it is effective at stripping out the signal D from the signal M to output predominantly the signal K at the terminal S₁. The signal at the terminal S₁ then passes to the circuit 50 which rectifies it to generate a d.c. potential across the capacitor C₂. The potential passes to power supply inputs V_s of the unit 510 and the transmitter 520 to apply power thereto. The signal M present at the terminal P₁ and the signal K present at the terminal S₁ are also conveyed to the inputs Clk and "Data input" respectively of the unit 510 which performs an exclusive-OR function to recover the signal D which is then output at the output D_o. The signal D propagates from the unit 510 to the transmitter 520 which is controlled by data conveyed in the signal D. The transmitter 520 responds to the data by emitting modulated 1 MHz radiation from the antenna 530.

The tag 500 provides the advantage that the transformer 40 performs a dual function, namely to generate a supply potential to power the tag 500 and also to provide signal filtration.

5 In order to reduce manufacturing cost and increase compactness, the inventor has appreciated that it is desirable that a tag should only incorporate a single antenna for both receiving and emitting radiation. In Figure 6, there is shown a tag indicated by 600 incorporating the antenna 20 and operable to both emit radiation therefrom and receive radiation thereat. The tag 600 further comprises the circuits 30, 50, the transformer 40 and a transmitter (TX) 610. The terminals T_1 , T_2 of the antenna 20 are connected to an input to
10 the circuit 30 and to a signal earth respectively. An output from the circuit 30 is connected to the terminal P_1 of the transformer 40. The terminal P_2 of the transformer 40 is connected to the signal earth. An output B of the transmitter 610 is connected through a resistor R_1 to the terminal P_1 of the transformer 40. The secondary terminal S_1 of the transformer 40 is connected to the circuit 50 in a similar manner to the tag 10. Moreover, the transmitter
15 610 further comprises an output V which is coupled through a capacitor C_3 to the terminal T_1 of the antenna 20.

Operation of the tag 600 will now be described with reference to Figure 6. Initially, the transmitter 610 is not energised such that its output B is at a potential of the signal earth.
20 Radiation having a carrier frequency of 1 GHz and modulated with a signal of 300 kHz is received at the antenna 20 which generates a corresponding signal across its terminals T_1 , T_2 . The signal is rectified to generate a 300 kHz signal across the capacitor C_1 which then passes to the primary region 42 of the transformer 40 to excite it into resonance. The transformer generates a voltage-enhanced output signal at a frequency of 300 kHz at the
25 terminal S_1 which is subsequently demodulated by the circuit 50 to provide a potential for

operating the transmitter 610.

The transmitter 610 functions to generate 100 μ sec duration bursts of 1 GHz signal at a repetition rate of 2 Hz at its output V. When the transmitter 610 is about to emit a burst of
5 1 GHz radiation from the antenna 20, it firstly switches its output B to a potential approaching that supplied by the circuit 50 which reverse biases the diodes D_1 , D_2 thereby disabling the circuit 30. The transmitter then outputs a burst signal through the capacitor C_3 to the antenna 20 from whence it is radiated as radiation. At the end of the burst signal, the transmitter switches its output B back to a potential of the signal earth so that the circuit
10 30 can continue to function to keep the capacitor C_2 charged until a next burst of radiation is to be emitted.

The tag 600 provides a further advantage that, because only one antenna 20 is required, the antenna 20 can, if required, be enlarged to occupy a majority of a major surface area of the
15 tag 600. Such enlargement is not possible to achieve when two or more antennae are incorporated into a tag, each antenna requiring more than 50% of the major surface area of the tag 600.

It will be appreciated by one skilled in the art that modifications can be made to the tags 10,
20 300, 400, 500, 600 without departing from the scope of the invention.

For example, the tags 10, 300, 400, 500, 600 can be moulded into a plastic block rather than being implemented in card-like form as illustrated in Figure 2. The block is a more robust shape compared to a card, thereby enable the tags 10, 300, 400, 500, 600 in block form to
25 be deployed in rugged environments, for marking out a path in a smoke filled burning

building. A block is distinguishable from a card in that the ratio of the block's length, width and thickness dimensions are less than 1:3. A block form also includes a cuboid form, a pyramidal form and a near-spherical or spherical form.

5 As an alternative to using the diodes D1 to D4 in the tags 10, 300, 400, 500, 600, FETs functioning as asynchronous detectors may be employed. FETS operating in this mode exhibit a voltage drop thereacross in the order of microvolts which is less than a forward bias voltage drop associated with diodes.

10 The tags 10, 300, 400, 500, 600 can be used as personnel wearable identity tags. They may be attached to items of merchandise and used in conjunction with an associated interrogating source to provide a merchandise anti-theft system.

The tags 10, 300, 400, 500, 600 can be used in a similar manner to "magic eye" reflectors
15 used to delineate lanes on motorways; a plurality of the tags 10, 300, 400, 500, 600 can be employed as interrogatable markers for marking out a path. Such use is potentially valuable, for example, for defining routes for automatically guided robotic vehicles around manufacturing and storage sites. The guided vehicles can be equipped with interrogating sources which are sensitive to direction of radiation emitted from the tags 10, 300, 400, 500,
20 600 thereby determining direction of the tags 10, 300, 400, 500, 600 relative to the vehicles. Each tag 10, 300, 400, 500, 600 can be provided with its own unique signature code, thereby enabling the vehicle to determine its position along the path from the signature codes. Such a method of vehicle guidance is preferable to wire guided vehicle systems where greater installation cost can arise when installing guiding wires compared to distributing tags.

In the tags 10, 300, 400, 500, 600, the transformer 40 can be replaced by an alternative piezo-electric device operable to increase voltage. One example of an alternative piezo-electric device is a ceramic bi-morph in the form of an elongate member supported at one of its end and free to vibrate at its other end; such a bi-morph is capable of exhibiting a higher Q-factor than the transformer 40, thereby providing an enhanced voltage increase. Another example of an alternative piezo-electric device is a micromachined silicon device comprising an array of one or more suspended silicon cantilevers, each cantilever incorporating a deposited film piezo-electric transducer operable to generate a signal in response to vibration of the cantilever. The transducers are connected in series to add their signal voltages together to provide an overall output for the circuit 50. An excitation transducer operable to be driven by a drive signal from the circuit 30 is also incorporated for mechanically exciting the one or more cantilevers into vibration, preferable at resonance of the cantilevers. Silicon cantilevers are capable of exhibiting high resonance Q-factors approaching several million when operating in a miniature evacuated housing, thereby providing a considerable increase in signal voltage amplitude at the overall output compared to the drive signal. Silicon micromachining is a well known mass production process and involves fabrication of mechanical structures in silicon material using batch lithographic, deposition and etching techniques.

The tags 10, 300, 400, 500, 600 can be modified to include other types of electronic circuits, for example memory circuits and environmental sensors, for example radiation and chemical sensors. Such electronic circuits enable the tags to function as miniature personal data loggers which are personnel wearable and useable for monitoring the safety of personnel in working environments, for example in chemical laboratories where hazardous chemicals are handled.

The tags 10, 300, 400, 500, 600 can be further miniaturised and adapted for inclusion within biological systems, for example for use as remotely controlled insulin dispensers, as heart-stimulating pace-makers or as artificial retina. Use of piezo-transformers powered from received modulated radiation avoids the need for batteries in the tags and thereby enables the

5 tags to be implanted permanently within biological systems without needing to be periodically removed.

CLAIMS

1. A piezo-electric tag including receiving means for receiving input radiation and generating a corresponding received signal, piezo-electric vibrating means for increasing voltage magnitude of the received signal to generate a supply potential and electronic circuit means powerable by the supply potential.
2. A tag according to Claim 1 wherein the vibrating means comprises a piezo-electric transformer incorporating mutually vibrationally coupled primary and secondary regions, the transformer operable to be excited into vibration by the received signal at the primary region and to generate a corresponding output signal at the secondary region for use in generating the supply potential.
3. A tag according to Claim 1 wherein the vibrating means comprises a piezo-electric bi-morph operable to be excited into vibration by the received signal and to generate a corresponding output signal for use in generating the supply potential.
4. A tag according to Claim 1 wherein the vibrating means comprises a silicon micromachined device comprising an array of one or more resonant elements, each element incorporating an associated piezo-electric transducer operable to generate an element signal in response to vibration of its associated element, the transducers connected in series to add their element signals to provide an overall output from which the supply potential is generated, and driving means operable to be driven by the received signal for stimulating the one or more elements into vibration and

thereby generating the supply potential.

5. A tag according to Claim 4 wherein the resonant elements are operable at resonance to generate the supply potential.
6. A tag according to Claim 4 or 5 wherein the resonant elements are housed in an evacuated environment for increasing their resonance Q factor.
7. A tag according to any one of Claims 1 to 6 wherein the receiving means incorporates demodulating means for demodulating modulation components present in the received radiation to generate the received signal.
8. A tag according to Claim 7 wherein the demodulating means incorporates zero-bias Schottky diodes for demodulating the received radiation to generate the received signal.
9. A tag according to Claim 7 wherein the demodulating means incorporates transistors operable as synchronous demodulators for demodulating the received signal to generate the received signal.
10. A tag according to any preceding claim wherein the circuit means is operable to function in a class C mode, thereby reducing tag power consumption.
11. A tag according to any one of Claims 1 to 10 wherein the receiving means incorporates first and second antennae for generating the received signal for exciting

the vibrating means, the first antenna adapted to respond to microwave radiation and the second antenna adapted to respond to radiation having a carrier frequency corresponding to a resonant frequency of the vibrating means

12. A tag according to any one of Claims 1 to 11 wherein the receiving means incorporates at least one of a metallic film dipole antenna, a loop antenna and a patch antenna for one or more of receiving and emitting radiation.
13. A tag according to any one or Claims 1 to 12 wherein the circuit means comprises responding means for emitting output radiation from the tag, the responding means powerable by the supply potential.
14. A tag according to Claim 13 wherein the vibrating means is operable to recover a clock component of Manchester bi-phase encoded radiation received at the tag and the responding means is operable to use the clock component to demodulate the encoded radiation to generate corresponding demodulated data for use in the tag.
15. A tag according to Claim 13 wherein the tag incorporates two antennae, one antenna for use in generating the received signal and the other incorporated into the responding means for at least one of emitting and receiving radiation.
16. A tag according to Claim 13 wherein the antennae are conductive metallic film dipole antennae.
17. A tag according to any preceding claim in the form of a block.

18. A tag according to any one or Claims 1 to 16 in the form of a planar card.
19. A tag according to Claim 18 wherein the card incorporates recesses for accommodating the receiving means, the vibrating means and the responding means.
20. A tag according to Claims 13 wherein the responding means is a transponder operable to receive input radiation to the tag and emit output radiation in response from the tag.
21. A tag according to Claim 20 wherein the transponder is operable to modulate the output radiation with a signature code by which the tag can be individually identified.
22. A tag according to Claim 20 or 21 wherein the transponder incorporates a reflection amplifier for amplifying the input radiation to generate the output radiation.
23. A tag according to Claim 20, 21 or 22 wherein the transponder is operable in a pseudo-continuous mode and incorporates a delay line for delaying the output radiation relative to the input radiation, thereby counteracting spontaneous oscillation from arising within the transponder from feedback therein.
24. A tag according to any preceding claim incorporating a metallic earthing plane for providing a common signal earth for the tag.

25. A tag according to any preceding claim adapted for implantation into a biological system and operable to at least one of monitor and stimulate the biological system.
26. A method of guiding vehicles along a path to a destination, the method comprising the steps of:
 - (a) distributing a plurality of tags according to any one of Claims 1 to 24 along the path and providing the vehicle with a direction sensitive interrogating source adapted to transpond with the tags;
 - (b) interrogating the tags from the source by emitting radiation to the tags and receiving radiation therefrom, thereby determining direction of the tags relative to the source and hence determining the path;
 - (c) moving the vehicle along the path; and
 - (d) repeating steps (b) and (c) until the vehicle reaches the destination.
27. A silicon micromachined device for receiving an input signal and generating a corresponding voltage magnitude enhanced output signal therefrom, the device comprising an array of one or more resonant elements, each element incorporating an associated piezo-electric transducer operable to generate an element signal in response to vibration of its associated element, the transducers connected in series to add their element signals to provide the output signal, and driving means operable to be driven by the input signal for stimulating the one or more elements into vibration and thereby generating the output signal.
28. A tag substantially as hereinbefore described with reference to Figures 1 to 6.

ABSTRACT

The invention provides a piezo-electric tag (10, 300) in the form of a card, the tag (10, 300) incorporating a first dipole antenna (20), a first rectification circuit (30), a piezo-electric transformer (40), a second rectification circuit (50) and a transponder circuit (60). In operation, the antenna (20) receives incoming radiation and generates a corresponding signal S_a which propagates to the first circuit (30) which demodulates and filters it to generate a signal S_b . The signal S_b is applied to the transformer (40) to excite it. The transformer (40) increase the voltage amplitude of the signal S_b by generating a relatively higher voltage amplitude signal S_c which is used in the tag (10, 300) to generate a signal S_d for supplying power to the transponder (60). The transformer (40) provides voltage magnitude enhancement to generate potentials suitable for operating active electronic circuits incorporated into the tag (10, 300). The tag can be personnel wearable and even adapted for permanent inclusion into biological systems.

Figure 1 should accompany the abstract.

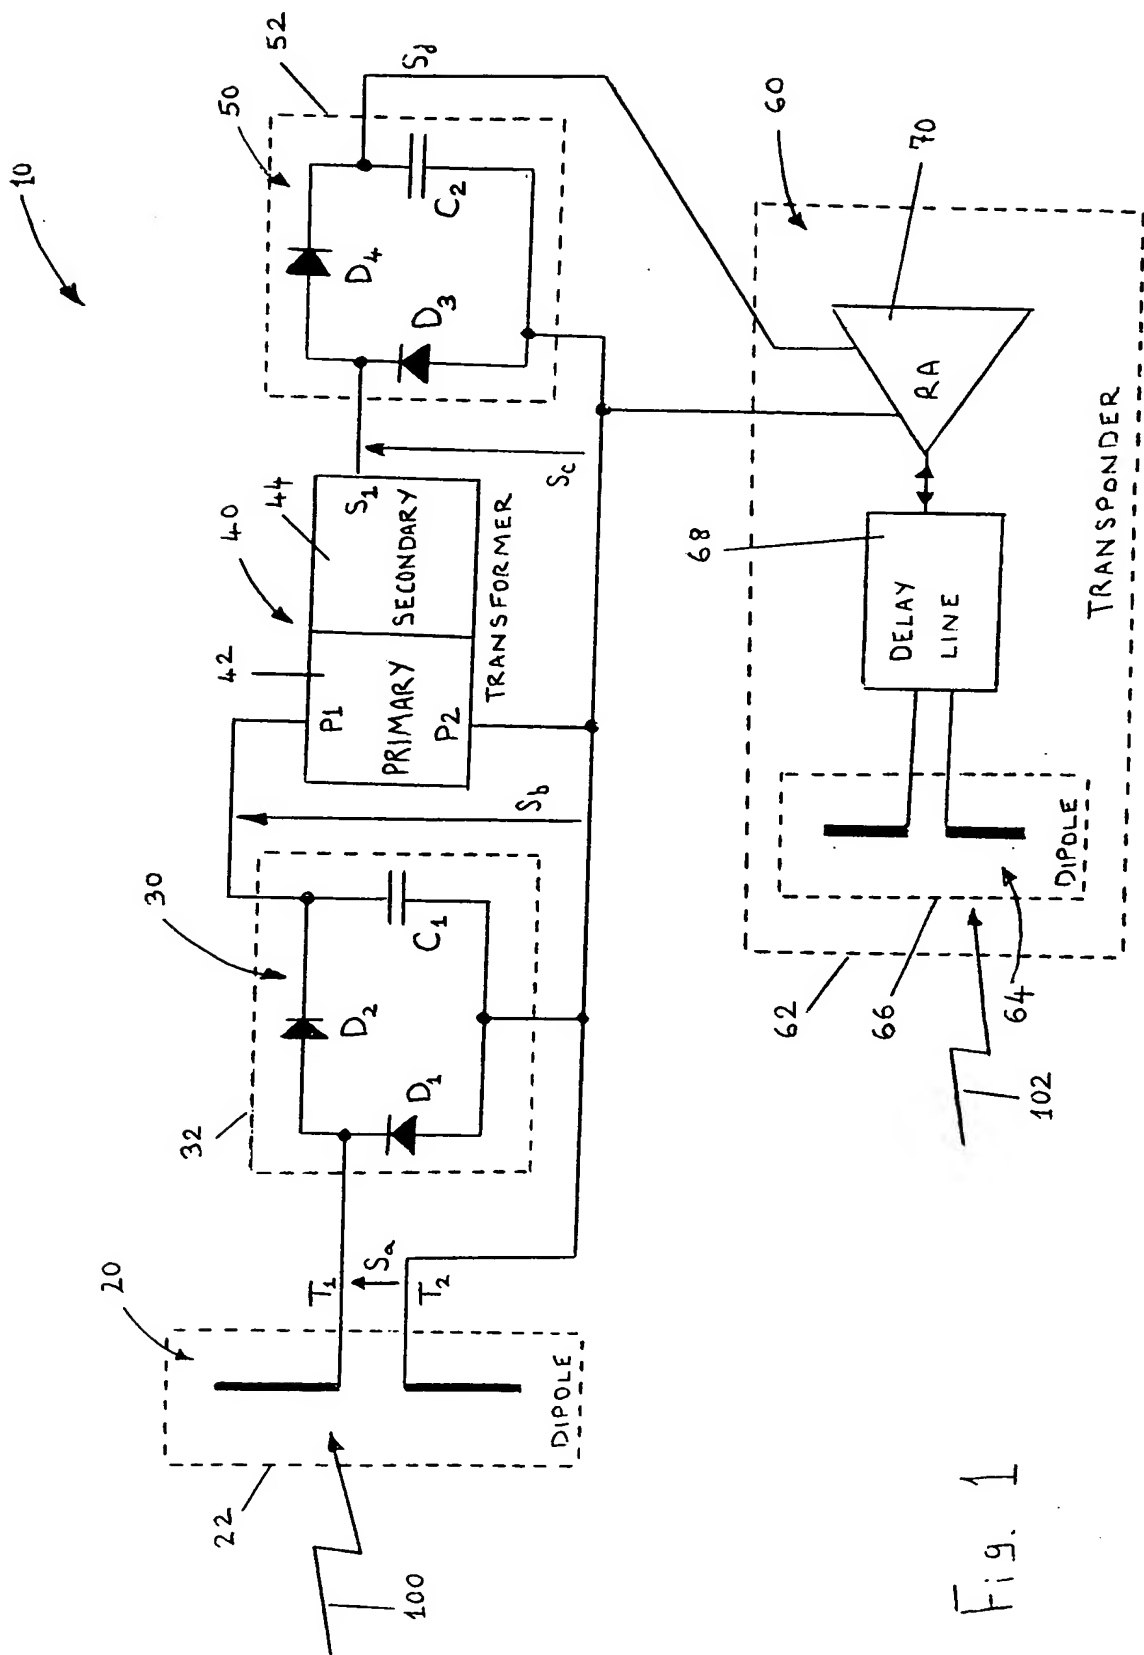


Fig. 1

THIS PAGE BLANK (USPTO)

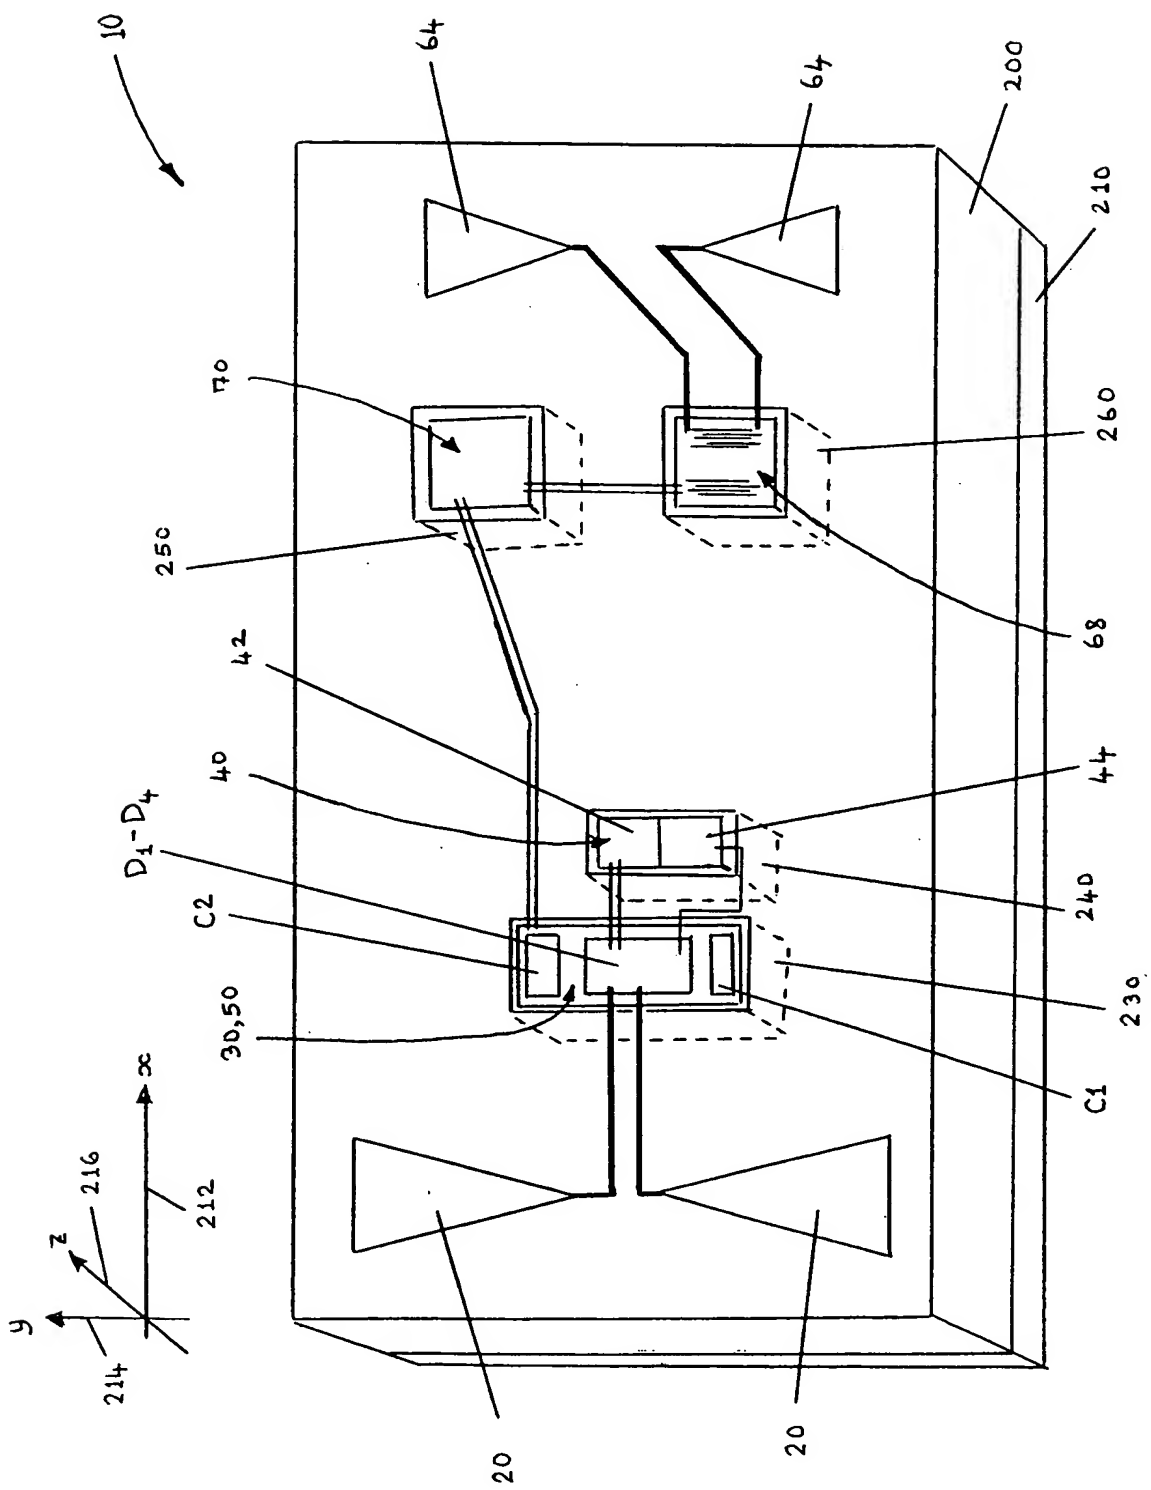


Fig. 2

THIS PAGE BLANK (USPTO)

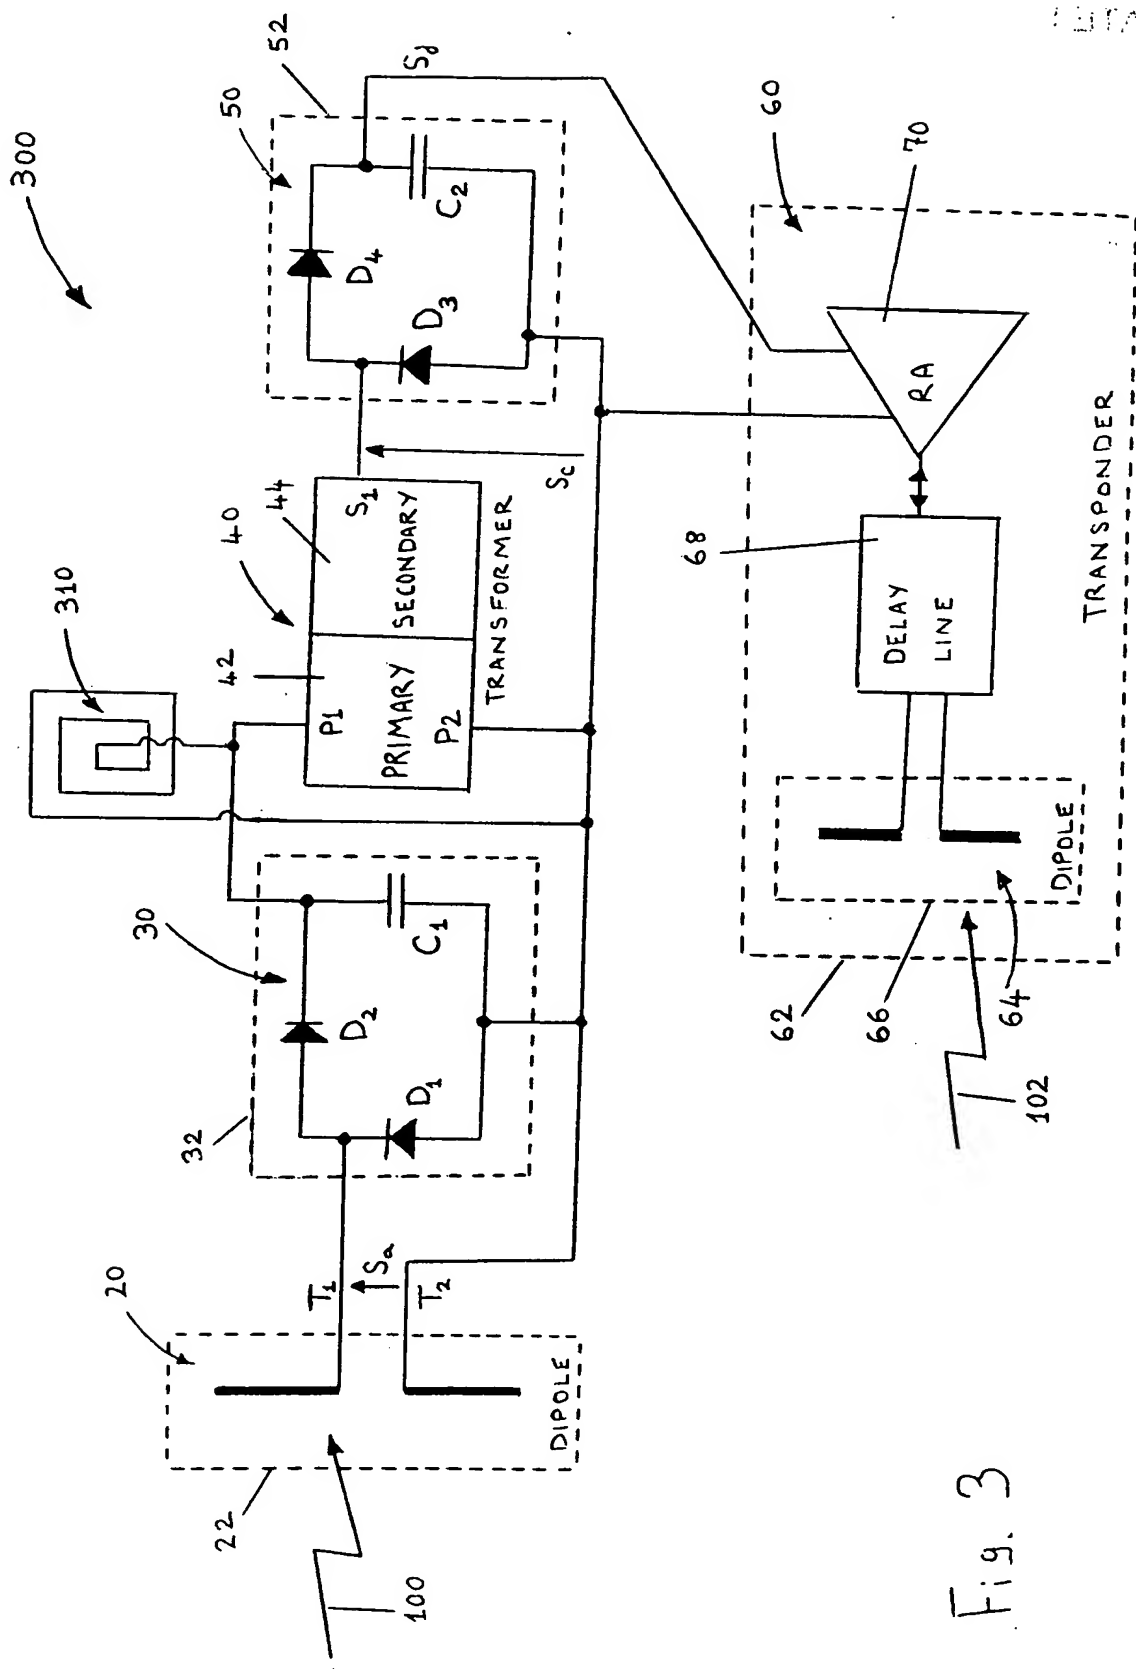


Fig. 3

THIS PAGE BLANK (USPTO)

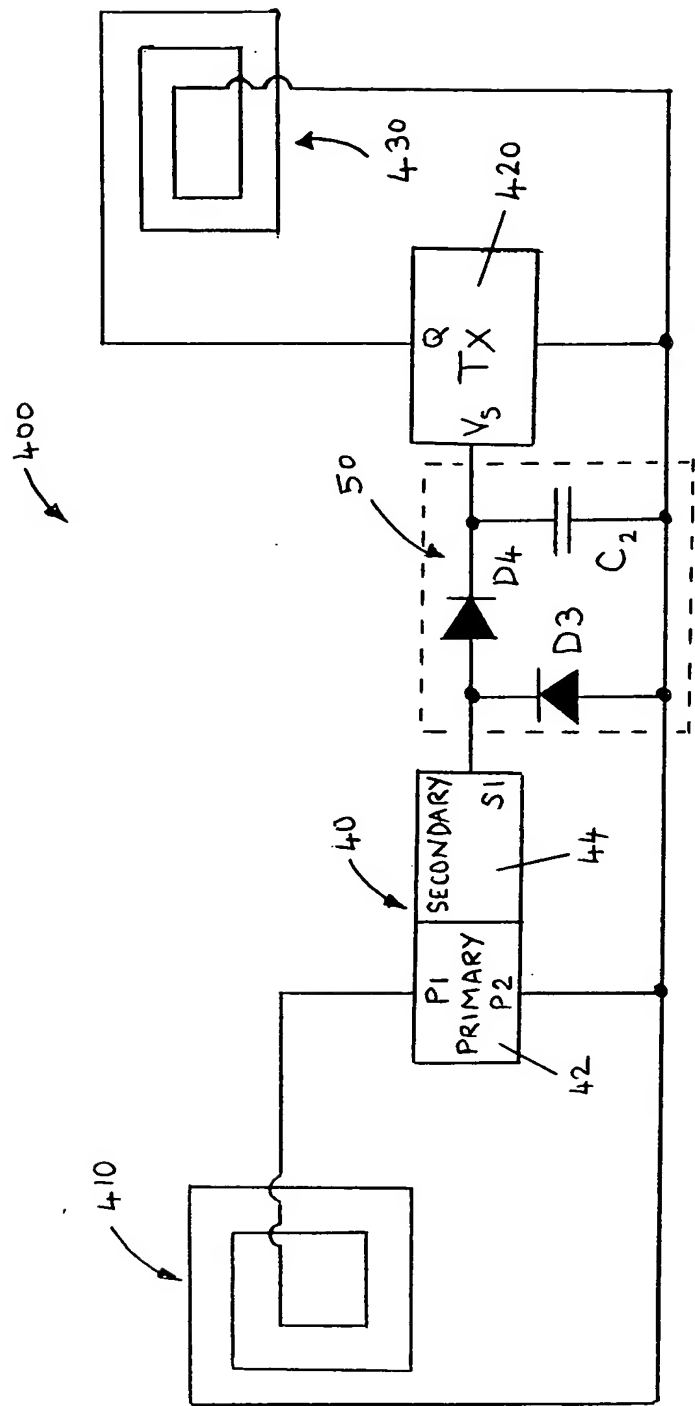


Fig. 4

THIS PAGE BLANK (USPTO)

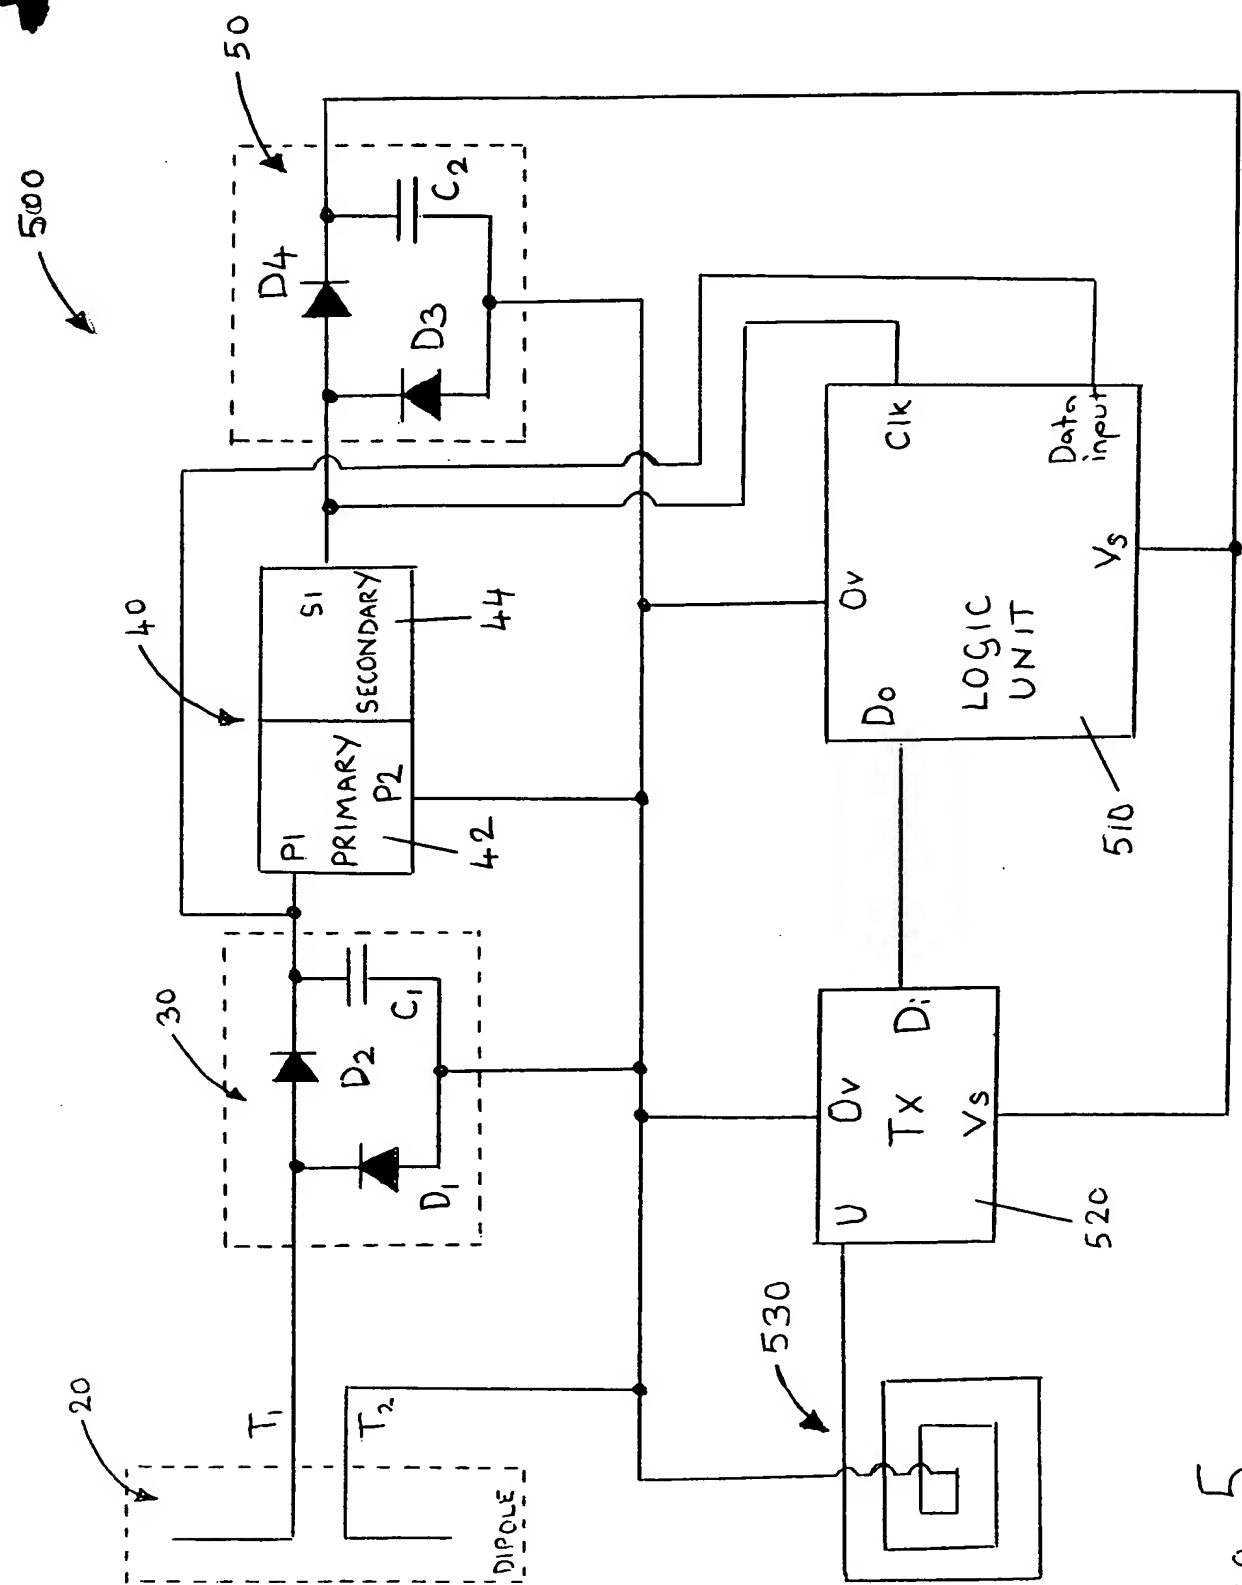


Fig. 5

THIS PAGE BLANK (USPTO)

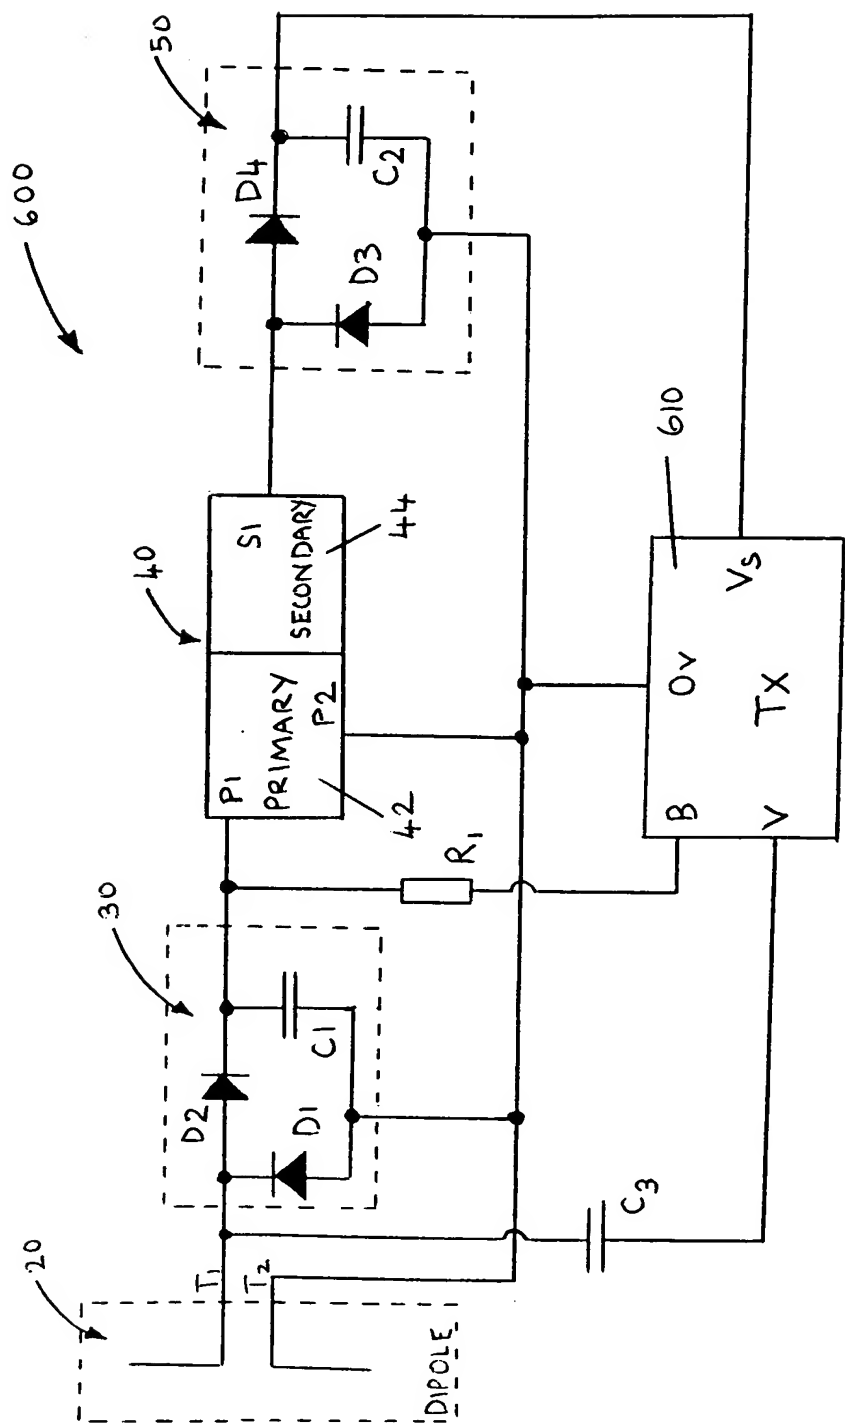


Fig. 6

PCT / GB 00 / 02944

15/08/00

Marconi

THIS PAGE BLANK (USPTO)